
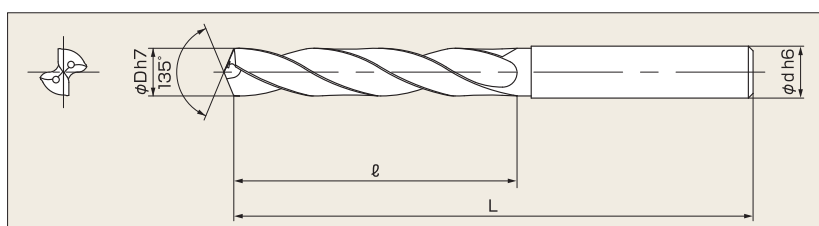


SSS オイルホール付OSドリル OSDOH
K10 SOLID CARBIDE OS DRILL WITH OIL HOLES

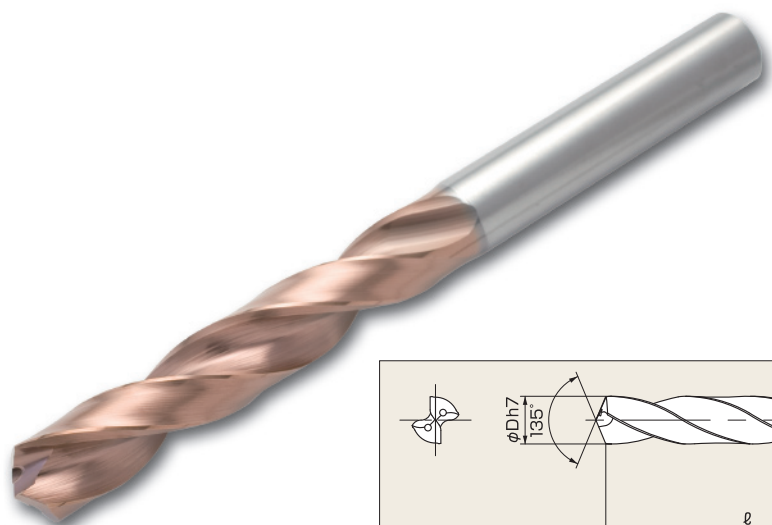

外径 (φD)	刃長 (ℓ)	全長 (L)	シャンク径 (φd)
3.00	25	60	3
3.10			
3.20			
3.30			
3.40			
3.50			
3.60			
3.70			
3.80			
3.90			
4.00			
4.10	30	70	5
4.20			
4.30			
4.40			
4.50			
4.60			
4.70			
4.80			
4.90			
5.00			

外径 (φD)	刃長 (ℓ)	全長 (L)	シャンク径 (φd)
5.10	35	75	6
5.20			
5.30			
5.40			
5.50			
5.60			
5.70			
5.80			
5.90			
6.00			
6.10	40	85	7
6.20			
6.30			
6.40			
6.50			
6.60			
6.70			
6.80			
6.90			
7.00			

外径 (φD)	刃長 (ℓ)	全長 (L)	シャンク径 (φd)
7.10	45	90	8
7.20			
7.30			
7.40			
7.50			
7.60			
7.70			
7.80			
7.90			
8.00			
8.10	50	100	9
8.20			
8.30			
8.40			
8.50			
8.60			
8.70			
8.80			
8.90			
9.00			

SSS **オイルホール付OSドリル OSDOH**
K10 **SOLID CARBIDE OS DRILL WITH OIL HOLES**

外径 (φD)	刃長 (ℓ)	全長 (L)	シャンク径 (φd)
9.10	55	105	10
9.20			
9.30			
9.40			
9.50			
9.60			
9.70			
9.80			
9.90			
10.00			
10.10	60	110	11
10.20			
10.30			
10.40			
10.50			
10.60			
10.70			
10.80			
10.90			
11.00			
11.10	65	115	12
11.20			
11.30			
11.40			
11.50			
11.60			
11.70			
11.80			
11.90			
12.00			

外径 (φD)	刃長 (ℓ)	全長 (L)	シャンク径 (φd)
12.50	70	130	13
13.00			
13.50	75	135	14
14.00			
14.50	80	150	15
15.00			
15.50	85	155	16
16.00			
16.50	90	160	16.5
17.00			
17.50	95	165	17.5
18.00			
18.50	100	170	18
19.00			
19.50	105	175	19
20.00			
20.00	110	180	20