




ソリッドテーパーラジアスエンドミル S-TREM2

SOLID CARBIDE TAPERED RADIUS END MILL

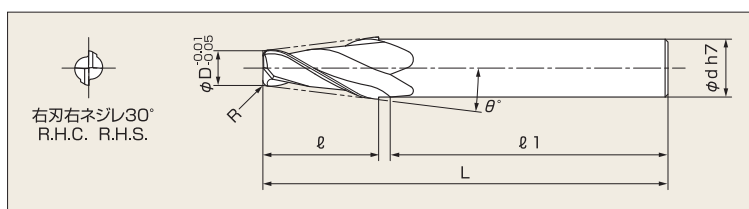

外径 (φD)	片角 (θ°)	コーナー (R)	刃長 (ℓ)	全長 (L)	シャンク長 (ℓ1)	シャンク径 (φd)
1	30°	0.2	4	45	35	4
		0.3				
	1°	0.2				
		0.3				
	1°30′	0.2				
		0.3				
	2°	0.2				
		0.3				
	3°	0.2				
		0.3				
	4°	0.2				
		0.3				
5°	0.2					
	0.3					
7°	0.2					
	0.3					
10°	0.2					
	0.3					
1.5	30°	0.2	5	33	33	4
		0.3				
		0.5				
	1°	0.2				
		0.3				
		0.5				
	1°30′	0.2				
		0.3				
		0.5				

外径 (φD)	片角 (θ°)	コーナー (R)	刃長 (ℓ)	全長 (L)	シャンク長 (ℓ1)	シャンク径 (φd)
1.5	2°	0.2	5	45	35	4
		0.3				
		0.5				
	3°	0.2				
		0.3				
		0.5				
	4°	0.2				
		0.3				
		0.5				
	5°	0.2				
		0.3				
		0.5				
7°	0.2					
	0.3					
	0.5					
10°	0.2					
	0.3					
	0.5					
2	30°	0.2	6	32	32	4
		0.3				
		0.5				
	1°	0.2				
		0.3				
		0.5				
	1°30′	0.2				
		0.3				
		0.5				



ソリッドテーパーラジアスエンドミル S-TREM2

SOLID CARBIDE TAPERED RADIUS END MILL

外径 (φD)	片角 (θ°)	コーナー (R)	刃長 (ℓ)	全長 (L)	シャンク長 (ℓ1)	シャンク径 (φd)
2	2°	0.2	6	45	32	4
		0.3				
		0.5				
	3°	0.2				
		0.3				
		0.5				
	4°	0.2				
		0.3				
		0.5				
	5°	0.2				
		0.3				
		0.5				
	7°	0.2				
		0.3				
		0.5				
10°	0.2	34	6			
	0.3					
	0.5					
2.5	30'	0.2	8	50	30	4
		0.3				
		0.5				
	1°	0.2				
		0.3				
		0.5				
	1°30'	0.2				
		0.3				
		0.5				
	2°	0.2				
		0.3				
		0.5				
	3°	0.2			34	6
		0.3				
		0.5				
4°	0.2					
	0.3					
	0.5					
5°	0.2					
	0.3					
	0.5					
7°	0.2	36	6			
	0.3					
	0.5					
10°	0.2	40	6			
	0.3					
	0.5					

外径 (φD)	片角 (θ°)	コーナー (R)	刃長 (ℓ)	全長 (L)	シャンク長 (ℓ1)	シャンク径 (φd)	
3	30'	0.2	10	60	40	6	
		0.3					
		0.5					
	1°	1.0					
		0.2					
		0.3					
	1°30'	0.5					
		1.0					
		0.2					
	2°	0.3					48
		0.5					
		1.0					
	3°	0.2			50		
		0.3					
		0.5					
	4°	1.0					
		0.2					
		0.3					
	5°	0.5					
		1.0					
		0.2					
7°	0.3						
	0.5						
	1.0						
10°	0.2						
	0.3						
	0.5						